



Sinepower has been developing and manufacturing 400Hz solid state Frequency Converters for more than a decade now.

Our policy, has always been, to offer the best designed products that are environmentally friendly, simple to use, easy to maintain and exceptionally well manufactured thus meeting our clients requirements as well as complying with all standards and legislation.

Sinepower's GPU units were designed with Power factor correction to guarantee a perfect sinusoidal input current from 25% to 150% load and a low THDI (<1.5%).

Sinepower ensure high quality, efficient and secure electrical power supplies.



INPUT

- State of the art semiconductor technology (IGBT) Rectifier
- Power Factor Correction (PF=1)
- 95% efficiency
- 4 Quadrant Operation (better response of the system and safer operation for NBPT)
- Low input harmonics (<1.5% THDI), to comply with the strictest regulations @ any load.



OUTPUT

- Voltage compensation (Load Dependent or via Remote Feedback – Real PLUG & PLAY. Connect GPU to aircraft and voltage compensation is done automatically, no user adjustment required or additional accessories)
- 4 Quadrant Operation (better response of the system and safer operation for NBPT)
- Vector control Inverter for better response and higher efficiency.



EFFICIENCY

- Up to 94% - 30kVA to 90kVA @ load PF=0.8 to 1.0
- 90% - < 30 kVA @ load PF=0.8 to 1.0
- Green Standby Function - losses: 20 W
- No load losses: <1%



TECHNOLOGY

- Enclosure Protection class up to IP55
- Enclosure with C4-M coating
- No break power transfer compatibility (NBPT)
- Over/under voltage at output
- Overload capability designed for:
 - Power stage 150% - Continuous
 - Magnetics 120% - Continuous
- Regulator Overload protections set at:
 - 120% for 600seconds
 - 150% for 60 seconds
 - 200% for 2 seconds
- Variable fan speed for internal temperature control
- Over temperature protection
- Short circuit proof by electric current limiting and shutdown
- 90% switch interlock



NORMS AND STANDARDS

AVIATION • ISO 6858 - Aircraft ground support electric supplies
 • SAE ARP 5015 - Ground equipment 400 Hz ground power performance requirement

MILITAR • MIL-STD-704 - Aircraft electric power characteristics

EMC • EN61000-6-4 - Electromagnetic compatibility - Generic emission standard
 • EN61000-6-2 - Generic immunity standard

SAFETY • IEC 60529 - Degrees of protection provided by enclosures (IP Code)
 • IEC 62477-1 - Safety requirements for power electronic converter systems and equipment

ENVIRONMENTAL • Dry heat test (steady state) IEC 60068-2-2 subclause 5.3
 • Damp heat test IEC 60068-2-78 subclause 6
 • Vibration test IEC 60068-2-6 subclause 6
 • Salt mist test IEC 60068-2-52 subclause 6
 • Dust and sand test Test Lc1 of IEC 60068-2-68

SPECIFICATIONS

SINERPGPU

90kVA SOLID STATE 400HZ
POWER UNIT & CABLE COIL

INPUT

- 3 phase 400V/415V AC | $\pm 15\%^*$
- 45Hz up to 65Hz
- Input current harmonics | <2% @ Full Load

OUTPUT

- 3 phase 200V AC -400Hz | $\pm 1\%^*$
- Overall Efficiency | 90%-95%
- Max. Crest Factor | 1.4:1

RECTIFIER

- 4 Quadrant Operation
- AC Voltage Range | -25% +10%
- Efficiency | 95%-97%
- Input Frequency Deviation | 10%
- Overload Capacity | 120% Continuous
- Inrush Current | None
- Overall current limit | 150%

* Other voltages and frequencies available on request

* Other Electronic Overload limits available on request

INVERTER

- Static Regulation 0 - 100% load | $\pm 1\%$
- Dynamic regulation 100% | 5%, recovering to 1% within 20ms
- Total harmonic distortion | Better than 3% (Linear Load)
- Electronic Limit Overload | 120%@600s; 150%@60s; 200%@5s*
- Overload Capacity (IGBTs) | 150% Continuous
- Frequency stability | $\pm 0.01\%$ Crystal Controlled
- Load power factor | 0-1
- Efficiency | 95%-98%
- Short circuit proof by electric current limiting and shutdown

ENVIRONMENTAL CONDITIONS


- Coolant temperature (max) | Forced air up to 40°C
- Ambient temperature (min/max) | -40°C to +40°C
- Relative humidity (min/max) | 0% to 90% without condensation
- Pollution degree | 2
- OVC (Overvoltage Category) | 3
- Altitude | Up to 2000m



TECHNICAL DRAWING

CABLE COIL

Main input power from GPU to aircraft	90 kVA
Max. output current	260A
Input power for cable drum to work	50/60Hz 400/220V
Input current not more than	16A
Cable winding speed	37.5 m/min
Cable unwinding speed	37.5 m/min
Cable length	24m***
Power of the reactor motor	0.55kW
Degree of protection	IP55
Environmental conditions, temperature value	Standard -20 to +40 C°
Control	Remote control/ directly from aircraft connector
Dimensions LxWxH	1050x800x800mm
Weight	250Kg

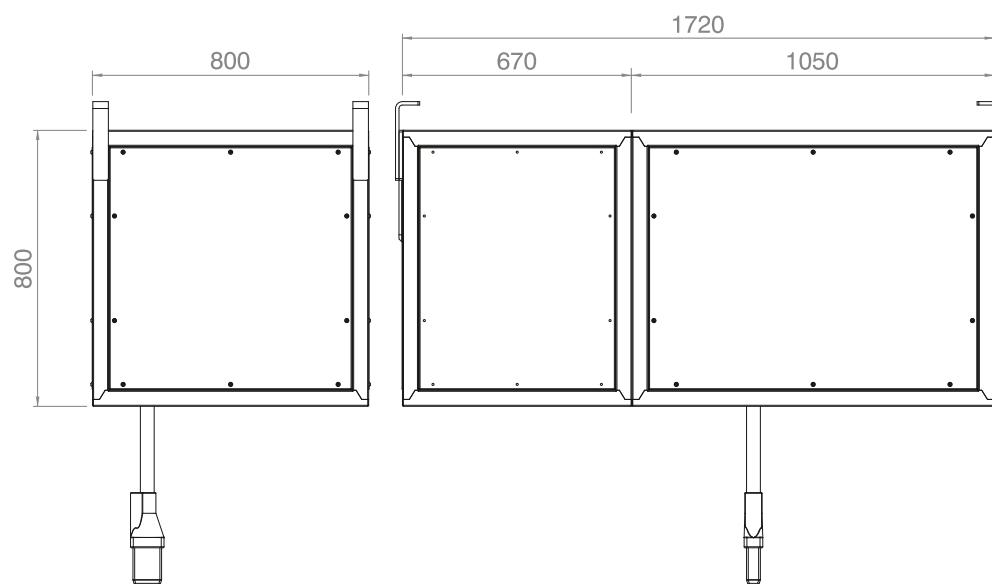

*** Other lengths are available on request (dimensions may change)



Zona Industrial do Mamodeiro
Rua Augusto Marques Branco, Lote 21-A
3810-783 Aveiro, Portugal

Phone: +351 234 946 000
Fax: +351 234 946 007
GPS: N40°34'20", W8°33'48"

sinepower@sinepower.pt
www.sinepower.com